



COMMERCIAL TOP LOAD WASHER

Huebsch® commercial top load washers combine the commercial qualities of larger capacity, front serviceability and durability with the attractive styling, cycle selections and ease of use of commercial/manual control washers. Huebsch top load washers deliver unmatched results and are compliant with the U.S. Department of Energy standards, making them the perfect combination of performance and efficiency.

LOW WATER USE

Huebsch top load washers meet current U.S. Department of Energy standards for commercial washers.

HIGH SPIN SPEED

With an industry-best final spin of 710 RPM, Huebsch top load washers remove more water from loads than many competing models. The end results are reduced drying times and lower utility consumption.

RUGGED DESIGN

Our top load washer is powered by a heavy-duty 1/2 horsepower motor. The washer performance is further fortified by an automatic balance system, which ensures cycles aren't interrupted by unbalanced loads.


UNMATCHED DURABILITY

Our commercial top load washer is manufactured at our Ripon, WI headquarters. The entire machine receives Huebsch's standard three-year warranty. In addition, Huebsch has more service representatives in the field than most brands have in their whole organization.

*Parts only, labor not included. See Huebsch Warranty Bond for specifics.



ELECTRONIC HOMESTYLE CONTROL

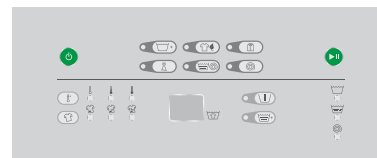

The Electronic Homestyle Control features a time-remaining display, six preset cycle buttons, cycle adjustability, additional cycle options and cycle status indicator lights.



COMMERCIAL TOP LOAD WASHER

Specifications		
Available Controls	Electronic Homestyle	Emech
Models	YWNE22PP115TW01 YWNE22PP115CW01	HWNMN2PP115TW01 HWNMN2SP115CW01
Capacity - lb (kg)	16 (7.3)	14 (6.4)
Cylinder Volume - cu. Ft. (liters)	3.19 (90.3)	3.19 (90.3)
Width - in (mm)	25.63 (651)	25.63 (651)
Depth - in (mm)	28 (711)	28 (711)
Height - in (mm)	43 (1092)	43 (1092)
Spin Speed - G-Force (RPM)	150 (710)	150 (710)
Motor Size - HP (kw)	0.5 (0.37)	0.5 (0.37)
Water Consumption per Cycle* - g (l)	28.07 (106)	28.07 (106)
IWF (Water Factor)	8.8	8.8
IMEF (Modified Energy Factor)	1.35	1.35
Available Water Temperatures	3	3
Available Cycles	Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse and Spin, Spin Only	Normal Hot, Normal Warm, Normal Cold, Delicate, Perm Press Warm, Perm Press Cold
Water Pressure - PSI (Bar)	20-120 (1.4/8.3)	20-120 (1.4/8.3)
Cycle Indicator Lights	Yes	Yes
Cylinder Finish	Porcelain	Stainless Steel, Porcelain
Available Colors	White	White
Available Electrical Requirements - (Voltage/Hz/Ph)	120/60/1	120/60/1
Net Weight - lb (kg)	186 (84)	206 (93)
Shipping Weight - lb (kg)	196 (89)	218 (99)
Shipping Width - in (mm)	28 (711)	28 (711)
Shipping Depth - in (mm)	30 (762)	30 (762)
Shipping Height - in (mm)	45 (1143)	45 (1143)
Available Agency Approvals	cUL _{us}	cUL _{us}

Note: Not all options are available for all models. Refer to the price list for the available models and options. Twelfth digit in model number indicates US or Canadian unit. C=Canada & T=US.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©Copyright 2018 Alliance Laundry Systems LLC

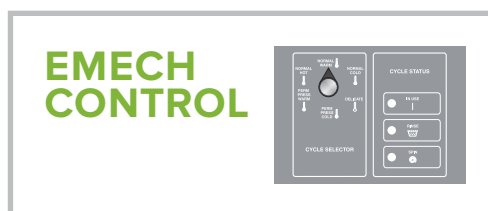

AH18-0030